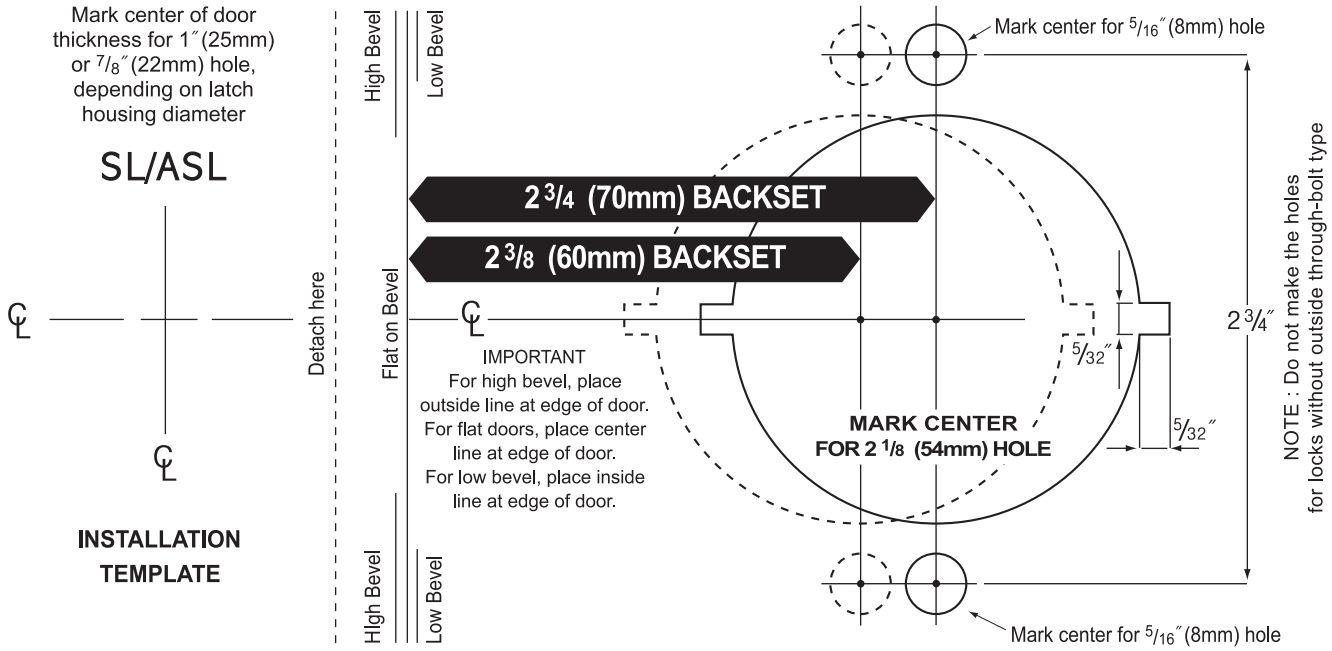
Mark center of door thickness for 1″(25mm) or 7/8″(22mm) hole, depending on latch housing diameter
SL/ASL
Detach here
INSTALLATION TEMPLATE
High Bevel
Low Bevel
Flat on Bevel
Hlgh Bevel
Low Bevel
2 3/4 (70mm) BACKSET
2 3/8 (60mm) BACKSET
IMPORTANT
For high bevel, place outside line at edge of door.
For flat doors, place center line at edge of door.
For low bevel, place inside line at edge of door.
Mark center for 5/16″(8mm) hole
MARK CENTER FOR 2 1/8 (54mm) HOLE
5/32″
5/32″
2 3/4″
NOTE : Do not make the holes for locks without outside through-bolt type
Mark center for 5/16″(8mm) hole